

KombiSIGN 50 / ASI-Device 845

AS-Interface Module BK



Part No.:	845.800.68
Series:	KombiSIGN 50



MECHANICAL DATA

Height	67 mm
Diameter	60 mm
Materials	PC
Dome colour	Black
Protection category	IP54
Working temperature minimum	-20°C
Working temperature maximum	+50°C
Weight with packaging	74 g
Product weight	60 g

ELECTRICAL DATA

Operating voltage	18,5 - 31,6V (ASI)
Rated operational current	50 mA
Protection class	Protection class 2
Pollution degree	3
AS-i Slave Type	Standard
AS-i Profile	S-8.F
connectivity	AS-Interface

APPROVAL DATA

Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Type 12
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	Yes
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 50 / ASI-Device 845

AS-Interface Module BK

DRAWING

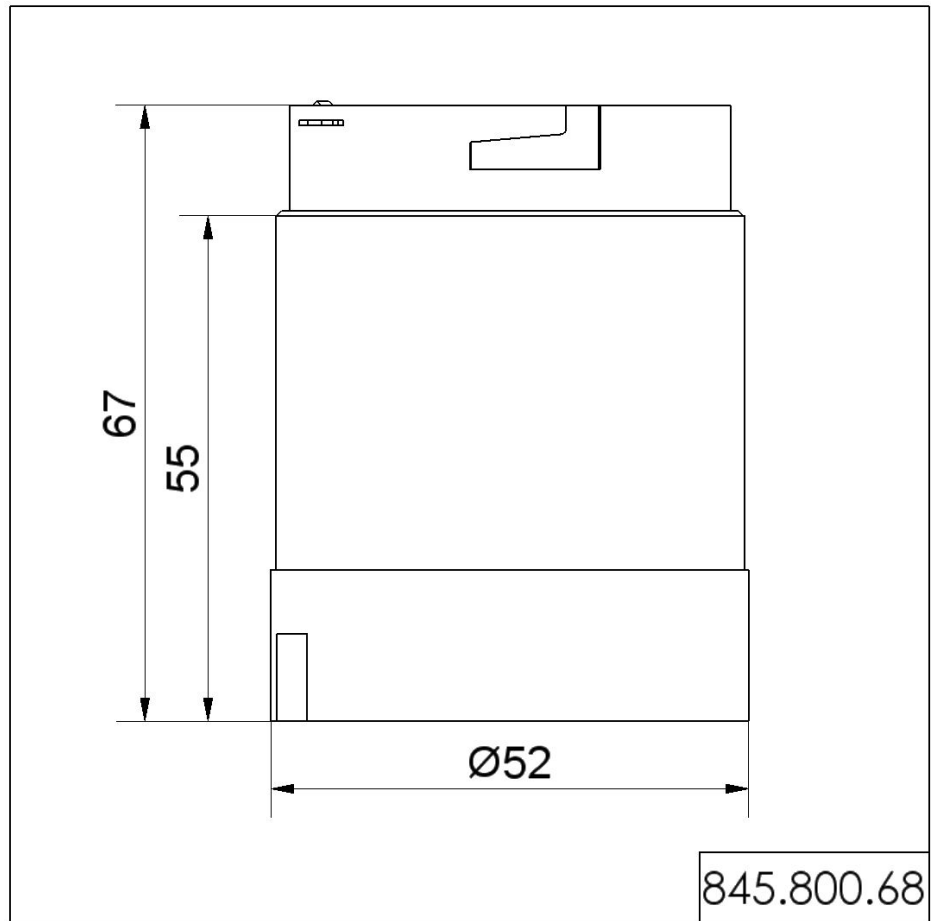


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

KombiSIGN 50 / ASI-Device 845

AS-Interface Module BK

TERMINAL ASSIGNMENT

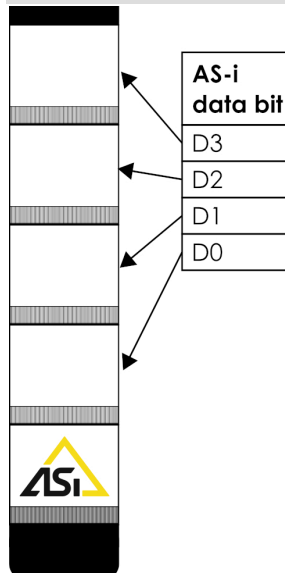

	Supply external (AUX)
Voltage	0-30 V DC 0-230 V AC External fuse M1,6A required
Output current	Σ 1,5 A
Supply (BUS/AUX)	AUX
Master profile	min. M1



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.