KombiSIGN 50 / Permanent Beacon 846 Perm. light element 12-230VAC/DC YE



ļ

Part No.:	846.300.00	
Series:	KombiSIGN 50	CC CA
MECHANI	CAL DATA	
Height		67 mm
Diameter		52 mm
Materials		PC
Dome colour		Yellow
Protection category		IP54
Tension relief		Not present
Working temperature minimum		-20°C
Working temperature maximum		+50°C
Weight with packaging		50 g
Product weight		40 g
ELECTRIC	AL DATA	
Operating voltage		12-230V
Operating voltage type		AC/DC
Protection class		Protection class 2
Pollution degree		3
Overvoltage category		11
Isolation voltage		Ui = 250V; Uimp = 2.500V
Power illuminant		max. 5W
OPTICAL I	ATA	
Light colour		Yellow
Service life optical		depends on bulb
Lamp fitting/socket		B15d
APPROVA		
Conforms with CE		Yes
Conforms with RoHS directive		Yes
WEEE		Yes
Conforms with ATEX-directive		No
Conforms with CCC		No
Conforms with UL		cULus
UL Type Rating		Type 12
Conforms with FCC		No
Conforms with IC		No
EAC certificate available		Yes
Conforms with UKCA (Importer)		Yes (WERMA (UK) Ltd.)
Conforms with CMIM		No
Conforms with AS-I		No
Conforms with AS-I		INU


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ

KombiSIGN 50 / Permanent Beacon 846 Perm. light element 12-230VAC/DC YE

ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

DRAWING

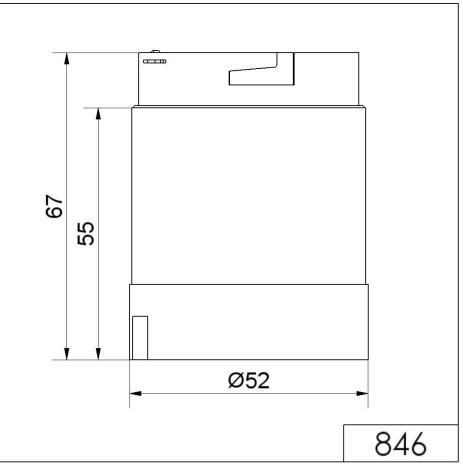

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.