Horns and Sirens / Heavy-Duty multi-tone sounder Multi-t.sounder WM 32 tne 115-230VAC RD



Part No.: 141.000.68

CE **MECHANICAL DATA** Length 132 mm Width 165 mm Height 136 mm Materials PC/ABS Housing colour Red Protection category IP66 Connection Screw terminals cross-sectional area maximum 2.50mm² / 14AWG Screwed cable gland Cable entry Cable entry minimum d = 8 mm Cable entry maximum d = 12 mmTension relief Present (conforms to VDE) Type of fixing Wall mounting Working temperature minimum -25°C Working temperature maximum +70°C Weight with packaging 667 g Product weight 606 g **ELECTRICAL DATA** Operating voltage 115-230V Operating voltage type AC Operating voltage frequency 50Hz at 230V 60Hz at 115V Operating voltage tolerance +/- 10% Rated operational voltage 230 VAC Rated operational current 22 mA Protection class Protection class 2 3 Pollution degree Overvoltage category Ш Isolation voltage Ui = 250V; Uimp = 2.500V**OPTICAL DATA** Service life optical 5,000 h minimum **ACOUSTIC DATA** Volume (max) at 1m distance 110,0 dB (A) Acoustic signal image Multi-tone Number of tones 32 tone Acoustic service life 5,000 h minimum

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


Horns and Sirens / Heavy-Duty multi-tone sounder Multi-t.sounder WM 32 tne 115-230VAC RD

APPROVAL DATA

Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	No
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Horns and Sirens / Heavy-Duty multi-tone sounder Multi-t.sounder WM 32 tne 115-230VAC RD

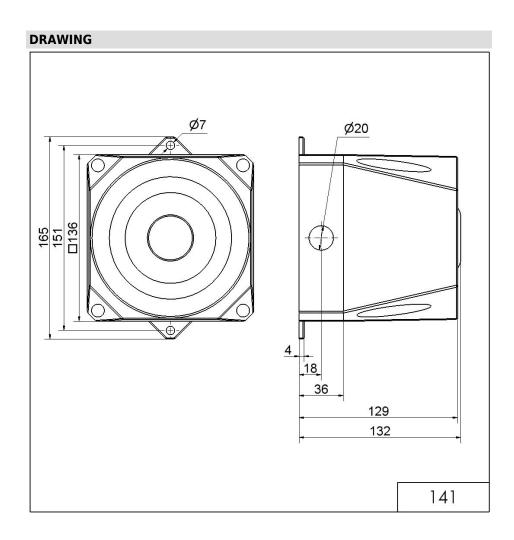

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.