Mini / LED/Multi-Tone Sounder 422 LED Multi-tne S. WM 8 tne 24VAC/DC RD



Part No.: 422.120.75



MECHANICAL DATA Heiaht 121 mm Diameter 83 mm Materials PC Dome colour Red Housing colour Grey Protection category IP65 Connection Screw terminals cross-sectional area maximum 1.50mm² / 16AWG Membrane grommet Cable entry Cable entry minimum d = 1 mmCable entry maximum d = 9 mmTension relief Pull-out protection Type of fixing Wall mounting Working temperature minimum -20°C Working temperature maximum +50°C Weight with packaging 166 g Product weight 130 g **ELECTRICAL DATA** Operating voltage 24V Operating voltage type AC/DC Operating voltage frequency 50Hz +/- 10% Operating voltage tolerance Rated operational voltage 24 VDC Rated operational current 80 mA Rated inrush current 500 mA Protection class 2 Protection class Pollution degree 3 **OPTICAL DATA** LED Light source Light colour Red Optical signal image Permanent Service life optical 50,000 h maximum **ACOUSTIC DATA** Volume (max) at 1m distance 109,0 dB (A) Acoustic signal image Multi-tone Number of tones 8 tone

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


Mini / LED/Multi-Tone Sounder 422 LED Multi-tne S. WM 8 tne 24VAC/DC RD

Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No
MTTF-value [years]	2673

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

ļ

Mini / LED/Multi-Tone Sounder 422 LED Multi-tne S. WM 8 tne 24VAC/DC RD

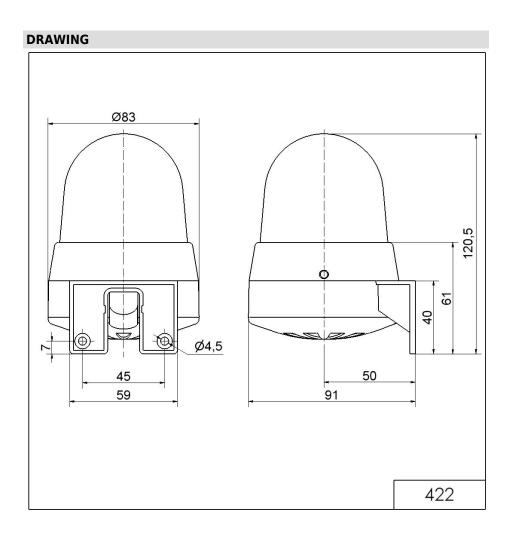

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.