

## Completely pre-assembled Signal Towers / RST 56 RST56 GN/RD 24V



|           |            |
|-----------|------------|
| Part No.: | 686.260.05 |
| Series:   | RST 56     |



### MECHANICAL DATA

|                              |                             |
|------------------------------|-----------------------------|
| Height                       | 156 mm                      |
| Diameter                     | 57 mm                       |
| Materials                    | ABS<br>PC<br>PC/ABS         |
| Dome colour                  | White                       |
| Housing colour               | Black                       |
| Protection category          | IP66<br>IP69K               |
| Connection                   | Spring-type terminal        |
| cross-sectional area minimum | 0,14mm <sup>2</sup> / 26AWG |
| cross-sectional area maximum | 1,50mm <sup>2</sup> / 16AWG |
| Cable entry                  | Through hole                |
| Cable entry maximum          | d = 9 mm                    |
| Type of fixing               | Base mounting               |
| Working temperature minimum  | -30°C                       |
| Working temperature maximum  | +50°C                       |
| Weight with packaging        | 228 g                       |
| Product weight               | 192 g                       |
| Stripping length             | 7 mm                        |
| IK-Code (IEC 62262)          | IK05                        |

### ELECTRICAL DATA

|                             |                    |
|-----------------------------|--------------------|
| Operating voltage           | 24V                |
| Operating voltage type      | DC                 |
| Operating voltage tolerance | +/- 10%            |
| Rated operational voltage   | 24 VDC             |
| Rated operational current   | 70 mA              |
| Rated inrush current        | 200mA              |
| Protection class            | Protection class 3 |
| Pollution degree            | 3                  |

### OPTICAL DATA

|                      |                  |
|----------------------|------------------|
| Light source         | LED              |
| Light colour         | Green<br>Red     |
| Optical signal image | Permanent        |
| Service life optical | 50,000 h maximum |

### APPROVAL DATA



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

## Completely pre-assembled Signal Towers / RST 56 **RST56 GN/RD 24V**


|                               |                       |
|-------------------------------|-----------------------|
| Conforms with CE              | Yes                   |
| Conforms with RoHS directive  | Yes                   |
| WEEE                          | Yes                   |
| Conforms with ATEX-directive  | No                    |
| Conforms with CCC-Ex          | No                    |
| Conforms with CCC             | No                    |
| Conforms with UL              | No                    |
| Conforms with FCC             | No                    |
| Conforms with IC              | No                    |
| EAC certificate available     | No                    |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM            | No                    |
| Conforms with AS-I            | No                    |
| Conforms with DNV             | No                    |
| Conforms with RoHS CN         | 25 years              |
| Conforms with VdS             | No                    |



For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / RST 56  
**RST56 GN/RD 24V**

**DRAWING**

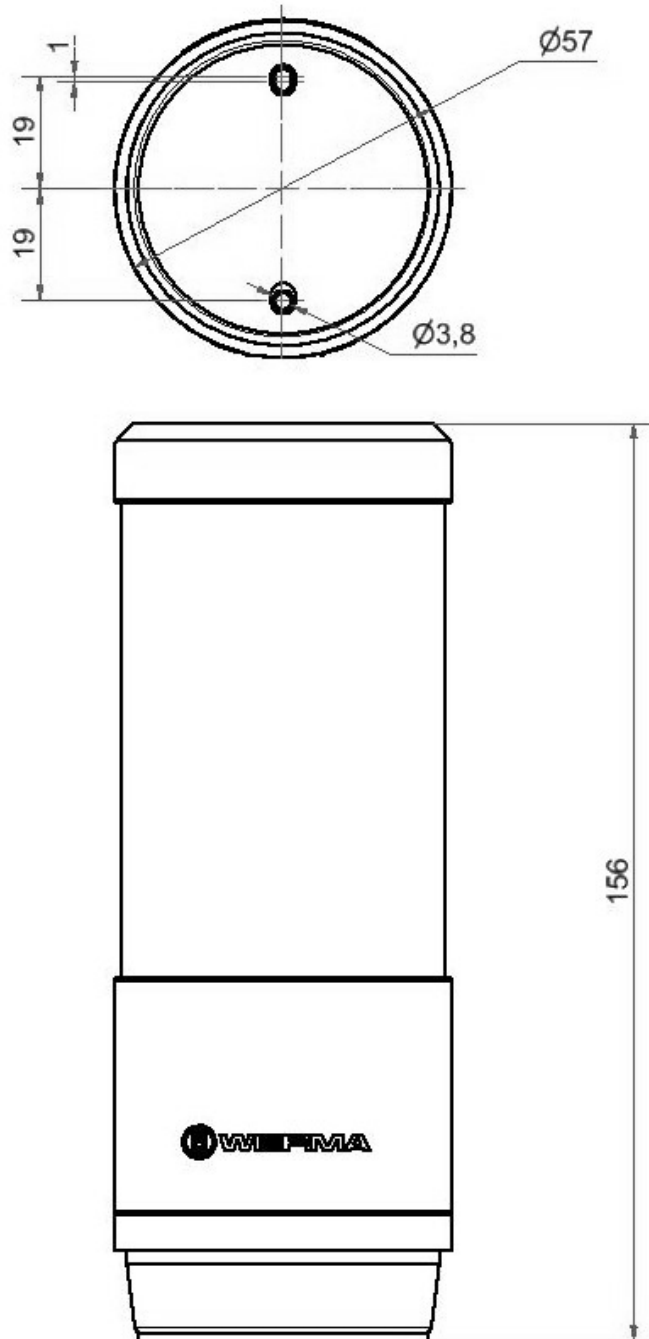

For additional installation and mounting information, refer to the appropriate user guide at [www.werma.com](http://www.werma.com). This printed copy is for information only and is subject to alteration.