

### Completely pre-assembled Signal Towers / RST 56

# RST56 GN/YE/RD/Feet 24V



Part No.: 686.371.05 Series: RST 56



MECHANICAL DATA	
Height	286 mm
Diameter	57 mm
Materials	ABS PC PC/ABS
Dome colour	White
Housing colour	Black
Protection category	IP66
Connection	Spring-type terminal
cross-sectional area minimum	0,14mm <sup>2</sup> / 26AWG
cross-sectional area maximum	1,50mm <sup>2</sup> / 16AWG
Cable entry	Through hole
Cable entry maximum	d = 9 mm
Type of fixing	Base mounting
Working temperature minimum	-30°C
Working temperature maximum	+50°C
Weight with packaging	302 g
Product weight	266 g
Stipping length	7 mm
IK-Code (IEC 62262)	IK05

ELECTRICAL DATA		
Operating voltage	24V	
Operating voltage type	DC	
Operating voltage tolerance	+/- 10%	
Rated operational voltage	24 VDC	
Protection class	Protection class 3	
Pollution degree	3	

OPTICAL DATA	
Light source	LED
Light colour	Green Red Yellow
Optical signal image	Permanent
Service life optical	50,000 h maximum

APPROVAL DATA		
Conforms with CE	Yes	
Conforms with RoHS directive	Yes	

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



### Completely pre-assembled Signal Towers / RST 56

# RST56 GN/YE/RD/Feet 24V

WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC-Ex	No
Conforms with CCC	No
Conforms with UL	No
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	No
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with CMIM	No
Conforms with AS-I	No
Conforms with DNV	No
Conforms with RoHS CN	25 years
Conforms with VdS	No


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.



Completely pre-assembled Signal Towers / RST 56

# RST56 GN/YE/RD/Feet 24V

### **DRAWING**

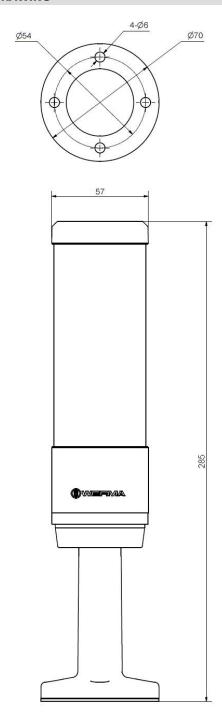

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.