

Mini installation beacon / MC35

MC35 UL Beacon 24V RGY M12



| | |
|-----------|------------|
| Part No.: | 241.420.55 |
| Series: | MC35 |



MECHANICAL DATA

| | |
|-----------------------------|---------------------|
| Height | 64 mm |
| Diameter | 35 mm |
| Materials | PC |
| Dome colour | Translucent |
| Housing colour | Black |
| Protection category | IP65 IP69K |
| Connection | M12 plug 5-pole |
| Tension relief | Pull-out protection |
| Type of fixing | Built-in mounting |
| Working temperature minimum | -20°C |
| Working temperature maximum | +50°C |
| Weight with packaging | 65 g |
| Product weight | 35 g |

ELECTRICAL DATA

| | |
|-----------------------------|---------------------------|
| Operating voltage | 24V |
| Operating voltage type | DC |
| Operating voltage tolerance | +/- 10% |
| Rated operational voltage | 24 VDC |
| Rated operational current | 20 mA |
| Rated inrush current | 25mA |
| Protection class | Protection class 2 |
| Pollution degree | 3 |
| | In the connection area: 2 |

OPTICAL DATA

| | |
|----------------------|------------------------|
| Light source | LED |
| Light colour | Green Red Yellow |
| Optical signal image | Permanent |
| Service life optical | 50,000 h maximum |

APPROVAL DATA

| | |
|------------------------------|-----|
| Conforms with CE | Yes |
| Conforms with RoHS directive | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC-Ex | No |



For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini installation beacon / MC35

MC35 UL Beacon 24V RGY M12

| | |
|-------------------------------|-----------------------|
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 4X |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | No |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with CMIM | No |
| Conforms with AS-I | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | 25 years |
| Conforms with VdS | No |
| MTTF-value [years] | 824 |




For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Mini installation beacon / MC35

MC35 UL Beacon 24V RGY M12

DRAWING

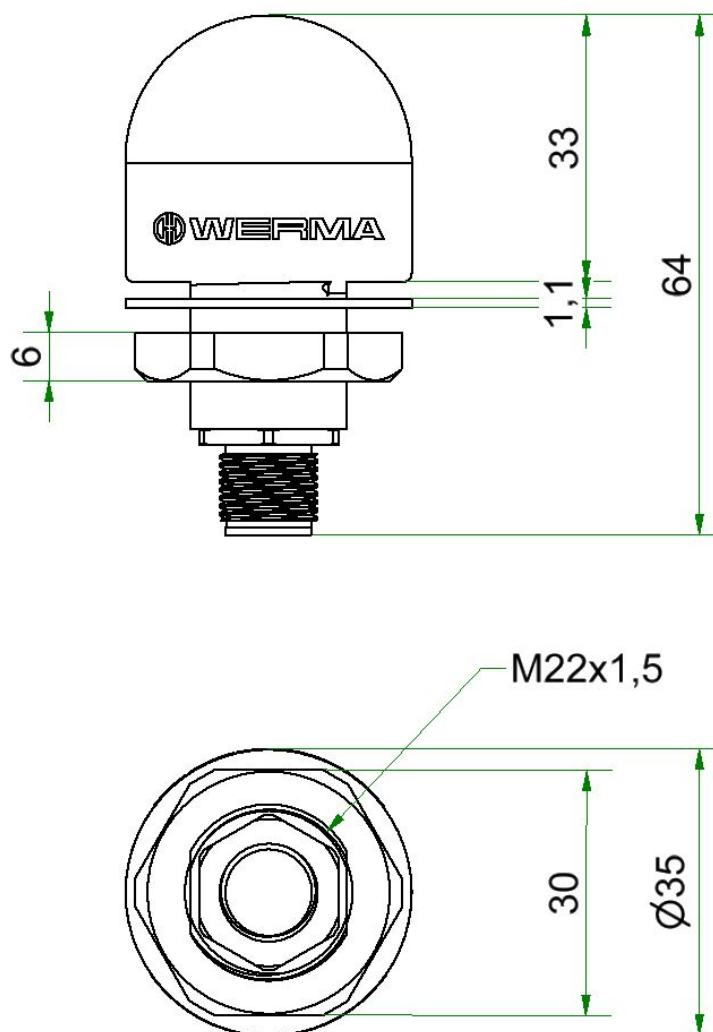

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.