Completely pre-assembled Signal Towers / KOMPAKT 37 K37 cable EM 24VAC/DC BU/GN/YE/RD



ļ

Part No.:	698.150.75		
Series:	Kompakt 37		
MECHANICAL DATA			
Height		209 mm	
Diameter		38 mm	
Materials		PC	
Dome colour		Blue Green Red Yellow	
Housing colour		Black	
Protection category		IP65	
Connection		Cable	
cross-sectional area maximum		0,34mm² / 22AWG	
Cable entry		Membrane grommet	
Cable entry minimum		d = 1 mm	
Cable entry maximum		d = 9 mm	
Cable length		2000 mm	
Tension relief		Pull-out protection	
Type of fixi	-	Built-in mounting	
Working temperature minimum		-20°C	
Working temperature maximum		+50°C	
Weight with packaging		229 g	
Product weight		190 g	
ELECTRICAL DATA			
Operating v	voltage	24V	
Operating voltage type		AC/DC	
Operating voltage frequency		50Hz	
Operating voltage tolerance		+/- 10%	
Rated operational voltage		24 VDC	
Rated operational current		135 mA	
Rated inrush current		500 mA	
Protection class		Protection class 2	
Pollution degree		3 In the connection area: 2	
OPTICAL DATA			
Light source		LED	
Light colour		Blue Green Red Yellow	


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37 K37 cable EM 24VAC/DC BU/GN/YE/RD

Optical signal image	Permanent
	50,000 h maximum
Service life optical	50,000 II Maximum
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Туре 12
	Type 4X
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37 K37 cable EM 24VAC/DC BU/GN/YE/RD

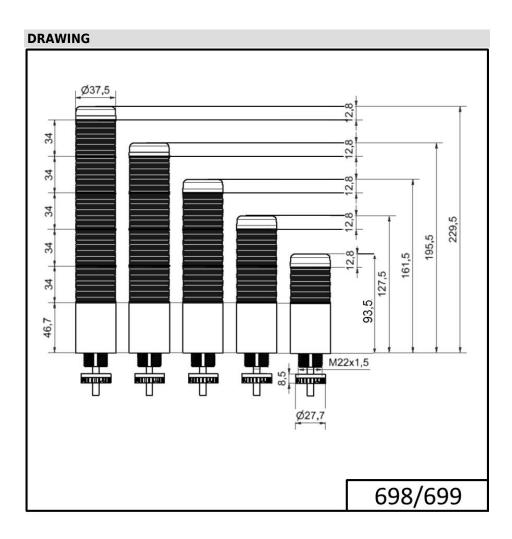

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.