Completely pre-assembled Signal Towers / KOMPAKT 37 K37 cable EM Pulse tone 24VAC/DC GN/YE/R



ļ

| Part No.: | 699.110.75 | | | |
|------------------------------|------------|-------|--------------------------------|--|
| Series: | Kompakt 37 | | | |
| MECHANICAL DATA | | | | |
| Height | | | 175 mm | |
| Diameter | | | 38 mm | |
| Materials | | | PC | |
| Dome colour | | | Green Red Yellow | |
| Housing colour | | | Black | |
| Protection category | | | IP65 | |
| Connection | | | Cable | |
| cross-sectional area maximum | | mum | 0,34mm² / 22AWG | |
| Cable entry | | | Membrane grommet | |
| Cable entry minimum | | | d = 1 mm | |
| Cable entry maximum | | | d = 9 mm | |
| Cable length | | | 2000 mm | |
| Tension relief | | | Pull-out protection | |
| Type of fixing | | | Built-in mounting | |
| Working temperature minimum | | imum | -20°C | |
| Working temperature maximum | | kimum | +50°C | |
| Weight with packaging | | | 198 g | |
| Product weight | | | 165 g | |
| ELECTRICAL DATA | | | | |
| Operating voltage | | | 24V | |
| Operating voltage type | | | AC/DC | |
| Operating voltage frequency | | псу | 50Hz | |
| Operating voltage tolerance | | ce | +/- 10% | |
| Rated operational voltage | | | 24 VDC | |
| Rated operational current | | | 125 mA | |
| Rated inrush current | | | 500 mA | |
| Protection class | | | Protection class 2 | |
| Pollution degree | | | 3 In the connection area: 2 | |
| OPTICAL I | DATA | | | |
| Light source | | | LED | |
| Light colour | | | Green Red Yellow | |
| Optical signal image | | | Permanent | |
| Service life optical | | | 50,000 h maximum | |


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37 K37 cable EM Pulse tone 24VAC/DC GN/YE/R

| ACOUSTIC DATA | |
|-------------------------------|-----------------------|
| Volume (max) at 1m distance | 85,0 dB (A) |
| Acoustic signal image | Pulse tone |
| Audio frequency | 2900 Hz |
| Acoustic service life | 5,000 h minimum |
| APPROVAL DATA | |
| Conforms with CE | Yes |
| Conforms with RoHS directive | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Туре 12 Туре 4Х |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |
| | |

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37 K37 cable EM Pulse tone 24VAC/DC GN/YE/R

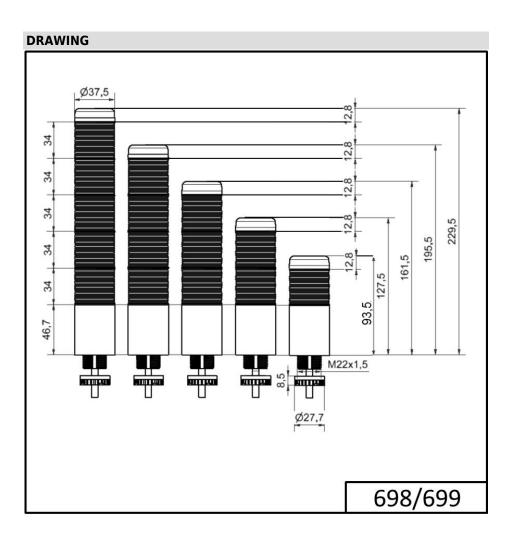

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.