## Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr plug EM Pulse tone 24VAC/DC GN/



ļ

MECHANICAL Height	mpakt 37			
Height				
Height	MECHANICAL DATA			
-		175 mm		
Diameter		38 mm		
Materials		PC		
Dome colour		Clear		
Housing colour		Silver		
Protection category		IP65		
Connection		M12 plug 5-pole		
Cable entry		Membrane grommet		
Cable entry minimum		d = 1 mm		
Cable entry maximum		d = 9 mm		
Cable length		150 mm		
Tension relief		Pull-out protection		
Type of fixing		Built-in mounting		
Working temperature minimum		-20°C		
Working temperature maximum		+50°C		
Weight with packaging		132 g		
Product weight		87 g		
ELECTRICAL DATA		24V		
Operating voltage				
Operating voltage type		AC/DC 50Hz		
Operating voltage frequency				
Operating voltage tolerance		+/- 10% 24 VDC		
Rated operational voltage		24 VDC 125 mA		
Rated operational current Rated inrush current				
		500 mA		
Protection class		Protection class 2		
Pollution degree		3 In the connection area: 2		
		in the connection area. 2		
OPTICAL DATA				
Light source		LED		
Light colour		Green Red		
		Yellow		
Optical signal image		Permanent		
Service life optical		50,000 h maximum		
ACOUSTIC DATA				
Volume (max) at 1m distance				
volume (max) a	at Im distance	85,0 dB (A)		


For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

## Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr plug EM Pulse tone 24VAC/DC GN/

Acoustic signal image	Pulse tone
Audio frequency	2900 Hz
Acoustic service life	5,000 h minimum
APPROVAL DATA	
Conforms with CE	Yes
Conforms with RoHS directive	Yes
WEEE	Yes
Conforms with ATEX-directive	No
Conforms with CCC	No
Conforms with UL	cULus
UL Type Rating	Туре 12 Туре 4Х
Conforms with FCC	No
Conforms with IC	No
EAC certificate available	Yes
Conforms with UKCA (Importer)	Yes (WERMA (UK) Ltd.)
Conforms with AS-I	No
ICAO Certification	No
Conforms with DNV	No
Conforms with RoHS CN	No
Conforms with VdS	No

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37 K37cl sr plug EM Pulse tone 24VAC/DC GN/

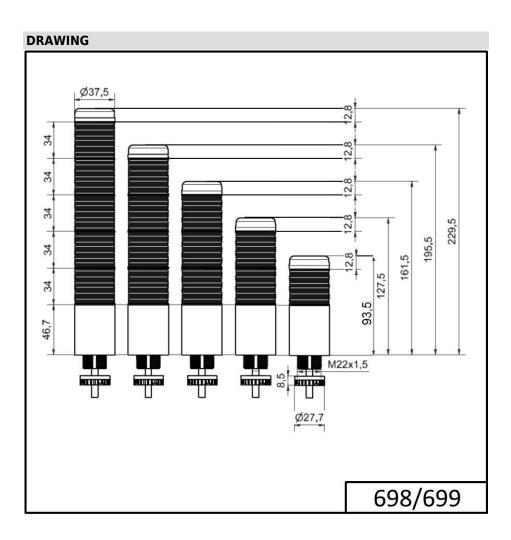

Provide the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.