EvoSIGNAL / EvoSIGNAL Accessories Mini Adapter Installation mount M22 GY





Part No.: 260.	700.03	
Series: EvoS	IGNAL	c U us
MECHANICAL D	АТА	
Height		33 mm
Diameter		62 mm
Materials		PC/ABS
Housing colour		Grey
Protection category		IP66
Cable entry		Through hole
Cable entry maximum		d = 12 mm
Type of fixing		Built-in mounting
Working temperature minimum		-30°C
Working temperature maximum		+60°C
Weight with packaging		25 g
Product weight		25 g
ELECTRICAL DA	Тл	
Pollution degree		3
Foliation degree		In the connection area: 2
APPROVAL DAT		
Conforms with CE		No
Conforms with RoHS directive		Fulfills substance restriction
WEEE		No
Conforms with ATEX-directive		No
Conforms with CCC		No
Conforms with UL		cULus
UL Type Rating		Туре 12
Conforms with FCC		No
Conforms with IC		No
EAC certificate available		Yes
Conforms with UKCA (Importer)		No
Conforms with AS-I		No
ICAO Certification		No
Conforms with DNV		No
Conforms with RoHS CN		No
Conforms with VdS		No

Pror additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

!

EvoSIGNAL / EvoSIGNAL Accessories Mini Adapter Installation mount M22 GY

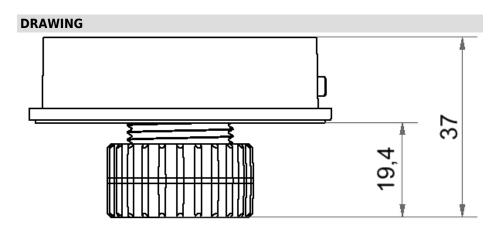

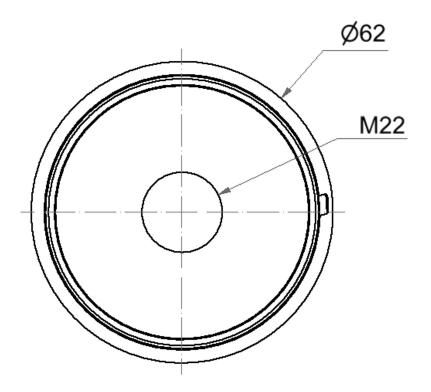

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.