Completely pre-assembled Signal Towers / KOMPAKT 37 K37 plug EM Pulse tone 24VAC/DC BU/GN/YE



ļ

| Part No.: | 699.250.75 | |
|-----------------------------|------------|--------------------------------|
| Series: | Kompakt 37 | CC CÂ |
| MECHANI | CAL DATA | |
| Height | | 209 mm |
| Diameter | | 38 mm |
| Materials | | PC |
| Dome colour | | Blue Green Red Yellow |
| Housing colour | | Black |
| Protection category | | IP65 |
| Connection | | M12 plug 8-pole |
| Cable entry | | Membrane grommet |
| Cable entry minimum | | d = 1 mm |
| Cable entry maximum | | d = 9 mm |
| Cable length | | 175 mm |
| Tension relief | | Pull-out protection |
| Type of fixing | | Built-in mounting |
| Working temperature minimum | | -20°C |
| Working temperature maximum | | +50°C |
| Weight with packaging | | 156 g |
| Product weight | | 102 g |
| ELECTRIC | AL DATA | |
| Operating voltage | | 24V |
| Operating voltage type | | AC/DC |
| Operating voltage frequency | | 50Hz |
| Operating voltage tolerance | | +/- 10% |
| Rated operational voltage | | 24 VDC |
| Rated operational current | | 160 mA |
| Rated inrush current | | 500 mA |
| Protection class | | Protection class 2 |
| Pollution degree | | 3 In the connection area: 2 |
| OPTICAL I | DATA | |
| Light source | | LED |
| Light colour | | Blue Green Red Yellow |
| Optical signal image | | Permanent |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.


ļ

Completely pre-assembled Signal Towers / KOMPAKT 37 K37 plug EM Pulse tone 24VAC/DC BU/GN/YE

| Service life optical | 50,000 h maximum |
|-------------------------------|-----------------------|
| ACOUSTIC DATA | |
| Volume (max) at 1m distance | 85,0 dB (A) |
| Acoustic signal image | Pulse tone |
| Audio frequency | 2900 Hz |
| Acoustic service life | 5,000 h minimum |
| APPROVAL DATA | |
| Conforms with CE | Yes |
| Conforms with RoHS directive | Yes |
| WEEE | Yes |
| Conforms with ATEX-directive | No |
| Conforms with CCC | No |
| Conforms with UL | cULus |
| UL Type Rating | Type 12 Type 4X |
| Conforms with FCC | No |
| Conforms with IC | No |
| EAC certificate available | Yes |
| Conforms with UKCA (Importer) | Yes (WERMA (UK) Ltd.) |
| Conforms with AS-I | No |
| ICAO Certification | No |
| Conforms with DNV | No |
| Conforms with RoHS CN | No |
| Conforms with VdS | No |

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.

Completely pre-assembled Signal Towers / KOMPAKT 37 K37 plug EM Pulse tone 24VAC/DC BU/GN/YE

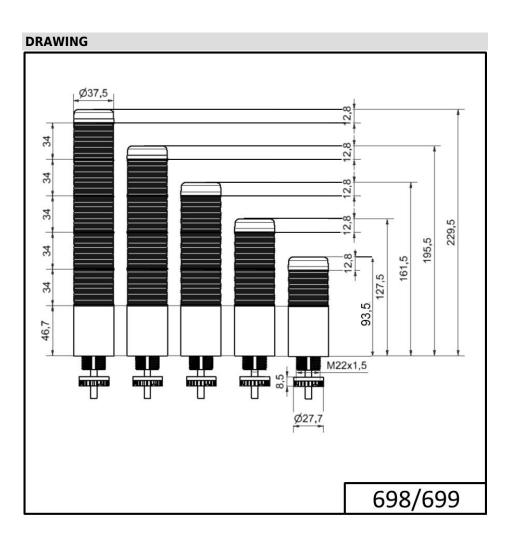

For additional installation and mounting information, refer to the appropriate user guide at www.werma.com. This printed copy is for information only and is subject to alteration.